


Mountain BEAR (TB01)

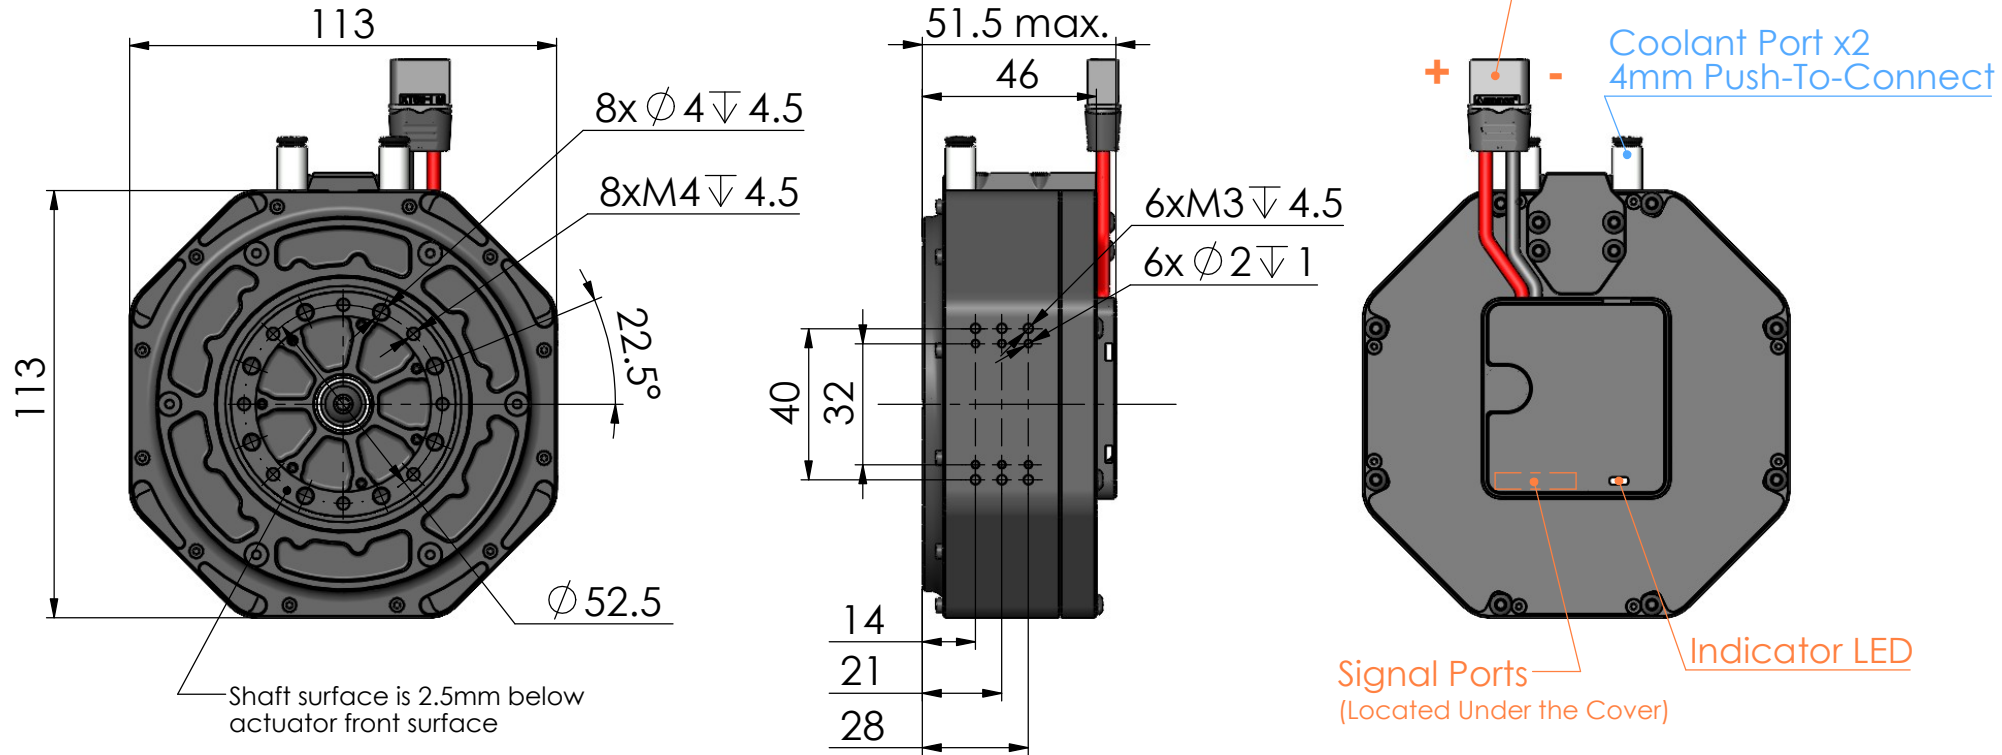

Application Notes:

1. We strongly recommend removing the Stock Plastic Ring and mount your payload directly on the output shaft, especially for heavy payload and applications with accuracy requirements.

2. The outer diameter of your payload's mounting surface should be no smaller than 62.5mm to ensure the inner ring of the output bearing is properly clamped, and no bigger than 66.9mm to avoid interference.

